
EDGE-SAFE STEEL PLANK
防錒金屬橋板

PATENT PENDING


ADVANTAGES 優點


- Strong & durable design
  堅固耐用
- Tucked-in edges to prevent scratches
  邊緣向內折疊的設計能防止刮傷
- Non-flammable & fire resistant
  不易燃燒、更安全
- Non-slip & allows water drainage
  防滑並設疏水孔
- Easy handling & transport
  易於操作和運輸
- Suitable for high-level platforms
  適用於高空平台

Item Code	Length (A)	Width	Thickness	Sheet Thk.	Coating	Weight
TSK-2000E	2000 mm	250 mm	50 mm	1.1 mm	Galv.	9.6 kg
TSK-3000E	3000 mm					14.3 kg
TSK-4000E	4000 mm					18.9 kg

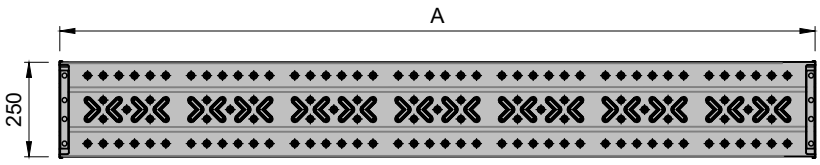



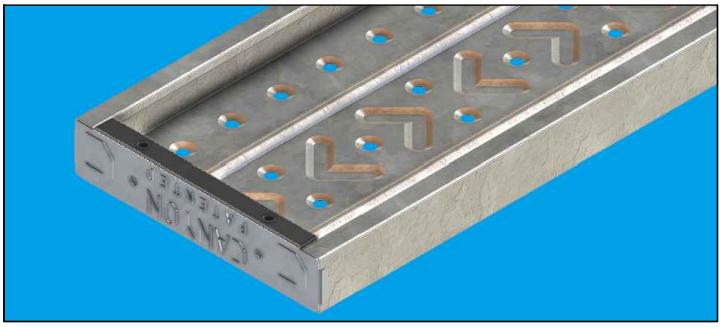

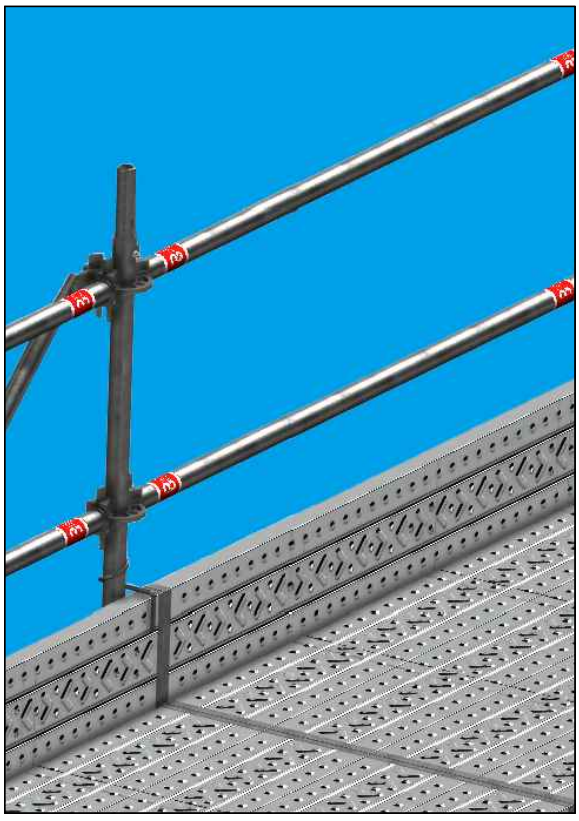

Permissible UDL at 1829 mm span	Permissible Point Load at 1829 mm span	Deflection at 150 kg
300 kg	150 kg	7.5 mm or less

Website : http://www.canyonhk.com Tel : (852) 2885 9633 Fax : (852) 2567 1611 Email : general@canyonhk.com

* All weights stated in catalog are for reference only.

1. HIGH SAFETY:

To prevent slippage, the tread surface has many holes that provide traction and allow water to drain through.

2. HIGH DURABILITY:


This product assures high durability through the designs of reinforced cross section and convex tread surface, pre-galvanized steel.

3. WIDE RANGE OF APPLICATIONS:

Walking passages for steel structure buildings, suspended scaffolding, toe boards, underground shield floor, working platform for scaffolding, etc.



Load-deflection curve

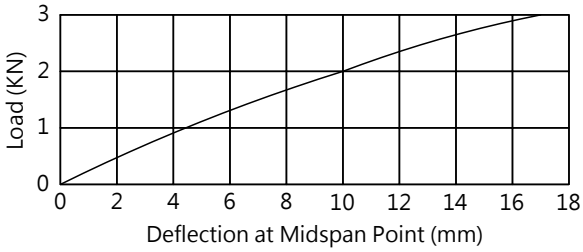


LIMPET PLANK COUPLER 丁字橋板碼仔




FEATURES 特點:

- Prevent plank from moving
  防止橋板移動
- Strengthen stability
  加強穩固
- Cost & Time Efficient
  節省成本和時間
- Used in Conjunction with Plank & Tube
  可配合橋板和圓管使用

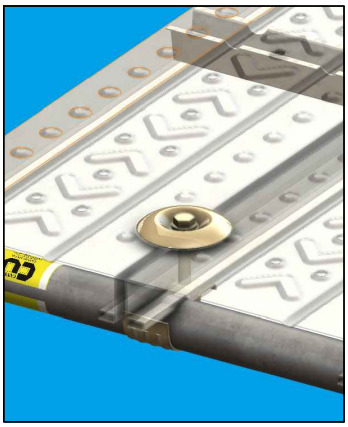

Code	Tube Dia.	Plank Thk.	Weight	Type
TCP-LPC	Ø48.3	50 mm	0.4 kg	JIS

SPIRAL PLANK CLIP 橋板定位梢

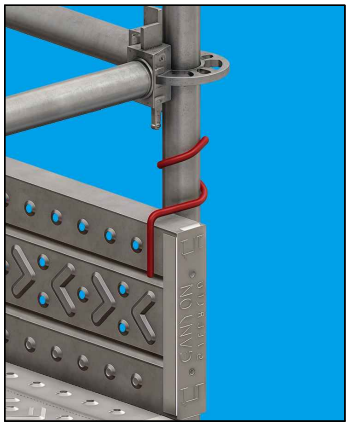

FEATURES 特點:

- Bolt-less Installation
  免螺絲安裝
- Used for Toe-Board Alternative
  固定橋板作踢腳板用途

VIDEO

Instruction Video
使用說明視頻



Code	Tube Diameter	Plank Thickness	Weight
TPN-SPPCLIP48	Ø48.6	50 mm	0.3 kg