# I-BEAM CATCH BASE
# 工字通道底桿

| Item Code | A | B | Weight |
|---|---|---|---|
| ***TSP-IBCB4*** | 1200 | 100 - 680 | 10.6 kg |
| ***TSP-IBCB5*** | 1450 | 190 - 920 | 11.3 kg |
| ***TSP-IBCB6*** | 1700 | 430 - 1190 | 12.0 kg |


- Safety Working Load: 200 kg (Cantilever Span)
- Max. Cantilever Span: 500 mm
- Max. I-Beam Flange Thickness: 55mm

## ADVANTAGES


- Developed for support of temporary walkway on steel I-beam
  為在鋼工字鋼上支撐臨時行人通道而開發的底桿
- Excellent stability and strength
  優良的穩定性和強度
- Simple installation and dismantle process
  簡單的安裝和拆卸程序

VIDEO

**Instruction Video**
使用說明視頻

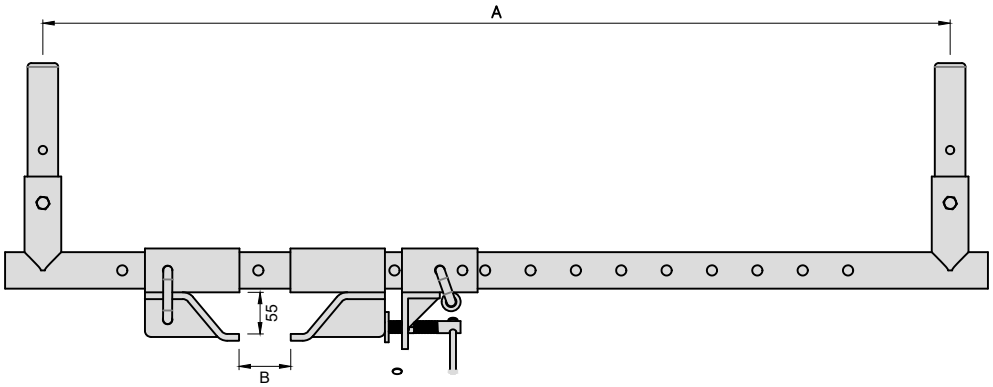


**Temporary Access on I-Beam Example**

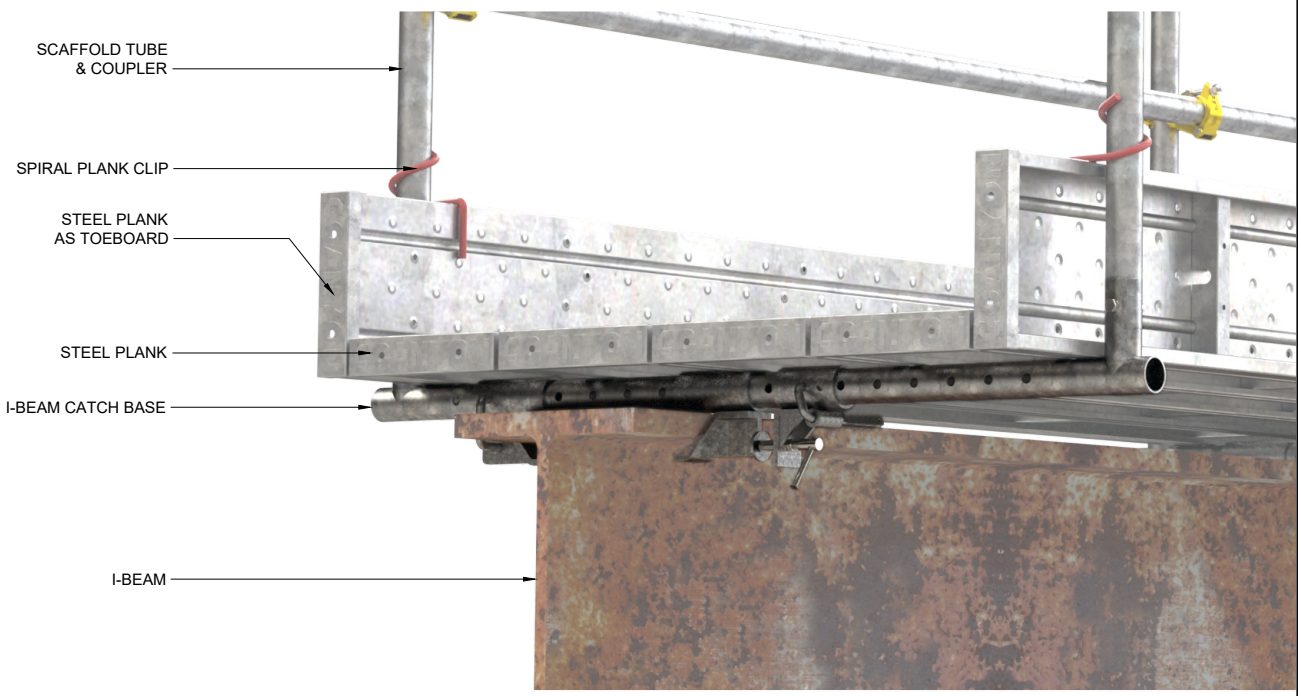




Website : http://www.canyonhk.com Tel : (852) 2885 9633 Fax : (852) 2567 1611 Email : general@canyonhk.com

* All weights stated in catalog are for reference only.